







Stand: April 2020

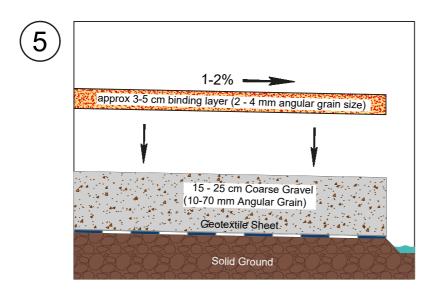

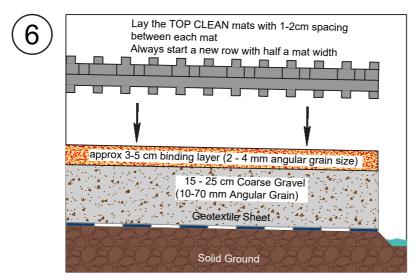


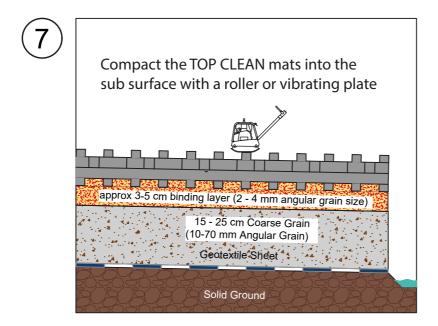




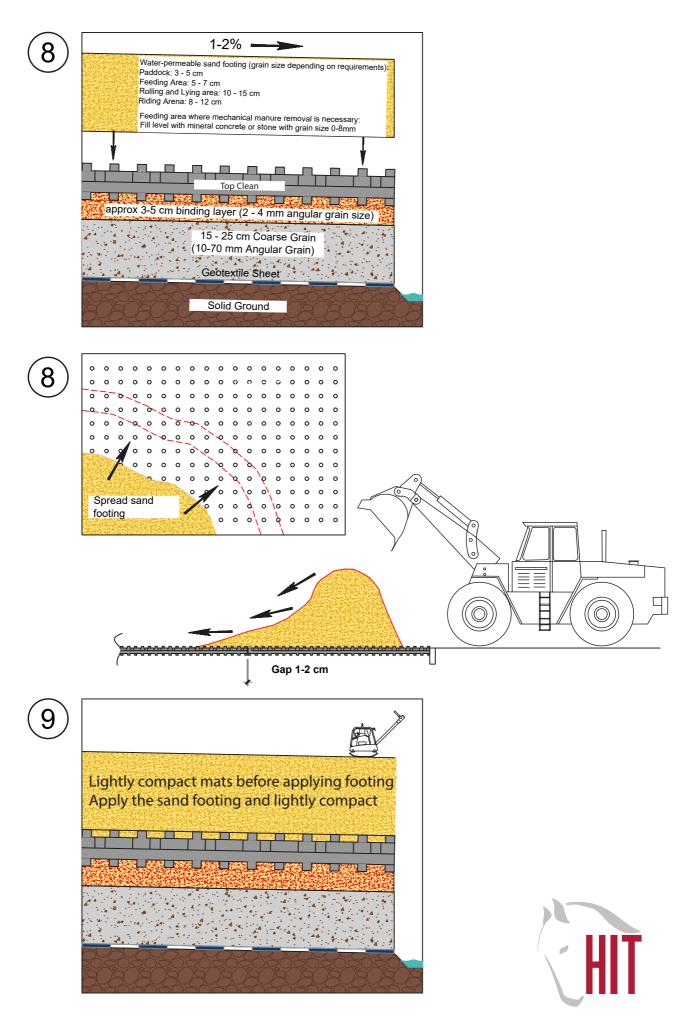

## Water permeable sand footing 3 - 5 cm approx depth

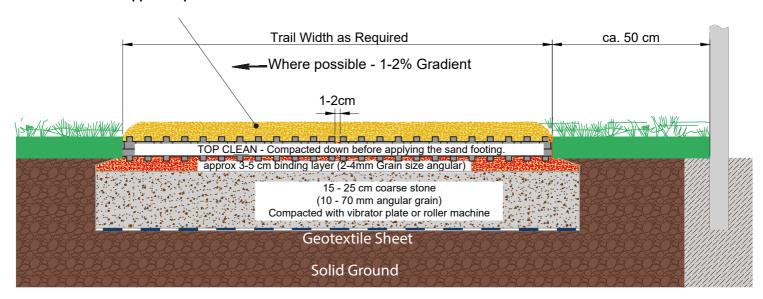

## **Cross Section**

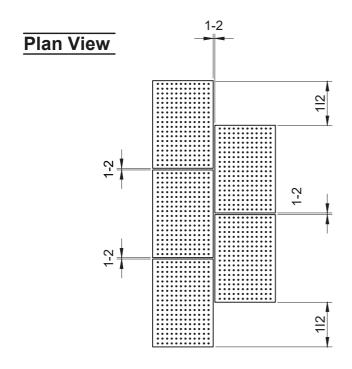

Important:

Always begin a new row with a half piece.

As an assembly aid for the joint spacing, we recommend wooden strips approx. 75 cm long and 1-2 cm wide

## **Contact:**

HIT Hinrichs Innovation + Technik, Kleine Straße 2 - D-25795 Weddingstedt

Tel.: +49 (0) 4 81 - 68 37 63-0 - Fax: 68 37 63-10, E-Mail: info@aktivstall.de



Stand: April 2020